



ROHS compliance


A

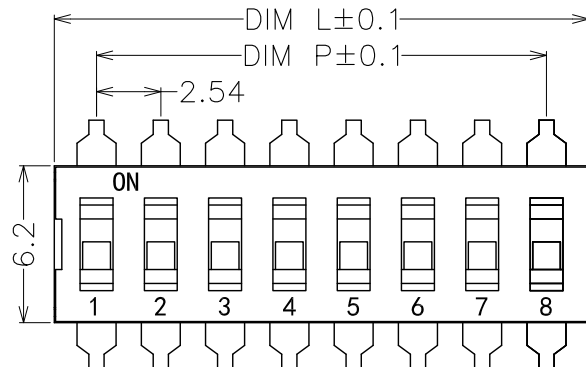

B

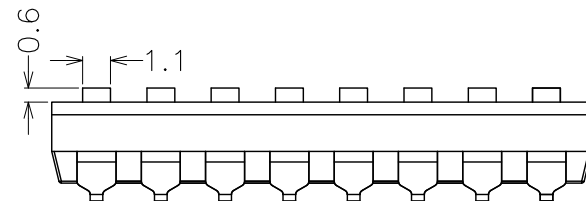


C

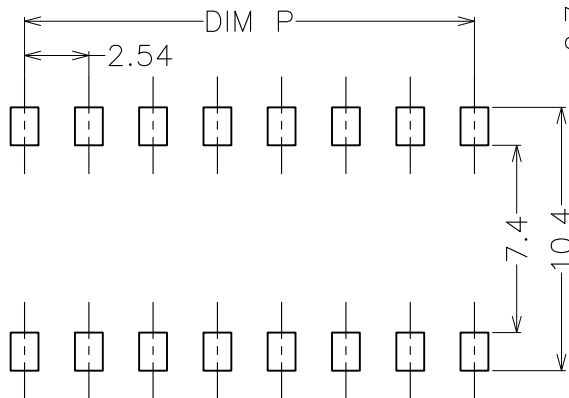


P.C.B.LAYOUT

SCHEMATIC(TYP.)




(1,2,3,4,5, POS AVAIL)


E

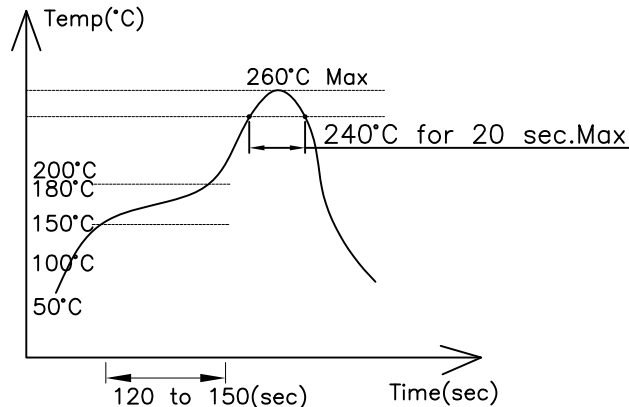

G Type



L Type



Yellow sticker

Poles	Dim P	Dim L
1P	--	3.34
2P	2.54	5.88
3P	5.08	8.42
4P	7.62	10.96
5P	10.16	13.50
6P	12.70	16.04
7P	15.24	18.58
8P	17.78	21.12
9P	20.32	23.66
10P	22.86	26.20
12P	27.94	31.28

版次 (Vension)	变更内容 (Rev. Content)	变更者 (Change Person)

Materials

- ①Button:PBT UL 94V-0
- ②Cover:PBT UL 94V-0
- Thermoplastic:Blue,Red,Black
- ③Base:PBT UL 94V-0
- ④Tape Sealed:Polyester Film
- ⑤Terminal & Movable Contact:Copper Alloy with Gold Plated

Specifications

- Contact Rating
- Switching.....25mA,24VDC
- Non-Switchin.....100mA,50VDC
- Contact Resistance
- Initial.....50mΩ Max
- After Life Test.....100mΩ Max
- Insulation Resistance.....100MΩ Min at 500VDC
- Dielectric Strength.....500VDC/1 minute
- Operating Force.....1000g Max
- Mechanical Life.....5000 cycles
- Electrical Life.....2000 cycles

Packaging Information

- All DIP switches are shipped in Tube
- Actuators all in "OFF" position
- Operating Temperature: -20°C~+70°C
- Storage Temperature: -40°C~+85°C
- Wave soldering: 260°C 5S max
- Hand soldering: 240°C 20S max

产品命名编码(Product Number Code):

GSW1005-2.54-XXP-1Y-00A(H)

产品型号(Series No.)

极数(No. of poles)

客户需求

(Customer Request)

塑体颜色(Housing Color)

- 1:单倍间距(Single Pitch)
- 2:双倍间距(Double Pitch)

- 2:蓝色(Blue) 6:红色(Red)
- 3:黑色(Black)

Ant Electronic CO.,LTD

公差范围(Tolerance Range)

型号(Type): GSW1005-2.54-XXP-13-00A(H)

核准(Approval):

图号(Drawing NO.):

审核(Audit):

单位(Units):mm

页码(Page): 1/1

设计(Design):

比例(Scale):FULL

版次(Version): T0

150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 (Angle)	X ±2° XX ±1°