
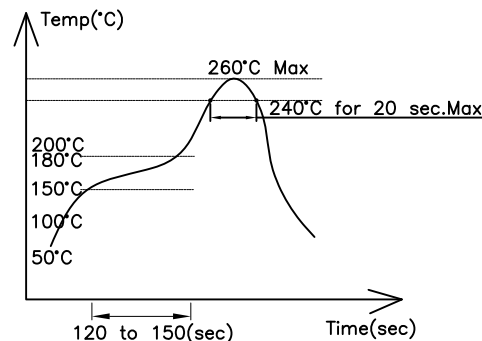



ROHS compliance

版次 (Vension)	变更内容 (Rev. Content)	变更者 (Change Person)

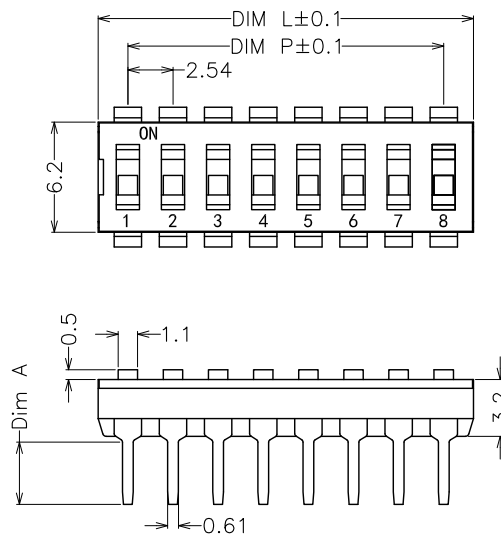


G Type

L Type

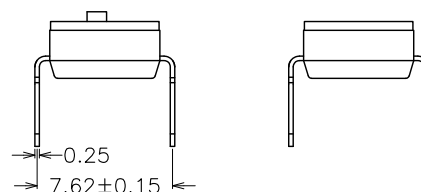



Poles	Dim P	Dim L
1P	—	3.34
2P	2.54	5.88
3P	5.08	8.42
4P	7.62	10.96
5P	10.16	13.50
6P	12.70	16.04
7P	15.24	18.58
8P	17.78	21.12
9P	20.32	23.66
10P	22.86	26.20
12P	27.94	31.28

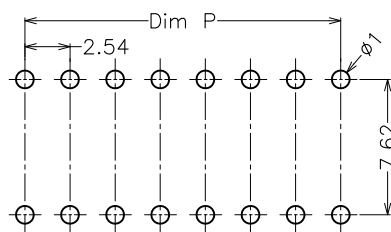

P.C.B.LAYOUT

	S:Short pin	L:Long pin
Dim A	3.0mm	3.5mm

SCHEMATIC(TYP.)

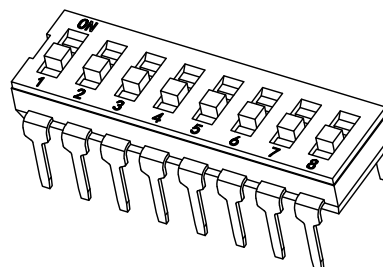

Materials

①Button:PBT UL 94V-0
②Cover:PBT UL 94V-0
Thermoplastic:Blue,Red,Black
③Base:PBT UL 94V-0
④Tape Sealed:Polyester Film
⑤Terminal & Movable Contact:Copper Alloy
with Gold Plated
Specifications
Contact Rating
Switching.....25mA,24VDC
Non-Switchin.....100mA,50VDC
Contact Resistance
Initial.....50mΩ Max
After Life Test.....100mΩ Max
Insulation Resistance.....100MΩ Min at 500VDC
Dielectric Strength.....500VDC/1 minute
Operating Force.....1000g Max
Mechanical Life.....5000 cycles
Electrical Life.....2000 cycles
Packaging Information
All DIP switches are shipped in Tube
Actuators all in "OFF" position
Operating Temperature: -20°C~+70°C
Storage Temperature: -40°C~+85°C
Wave soldering: 260°C 5S max
Hand soldering: 240°C 20S max

产品命名编码(Product Number Code):

GSW1004-2. 54-XXP-1Y-00A (H)

产品型号(Series No.)

极数(No. of poles)

客户需求

(Customer Request)

塑体颜色(Housing Color)

1:单倍间距(Single Pitch)
2:双倍间距(Double Pitch)

2:蓝色(Blue) 6:红色(Red)
3:黑色(Black)

Ant Electronic CO.,LTD

公差范围(Tolerance Range)

150~ ±1.50

60~150 ±1.00

30~60 ±0.60

6~30 ±0.40

0~6 ±0.25

角度(X) ±2°

(Angle) XX ±1°

型号(Type): GSW1004-2. 54-XXP-13-00A (H)

核准(Approval):

图号(Drawing NO.):

审核(Audit):

单位(Units):mm

页码(Page): 1/1

设计(Design):

比例(Scale):FULL

版次(Version): T0