



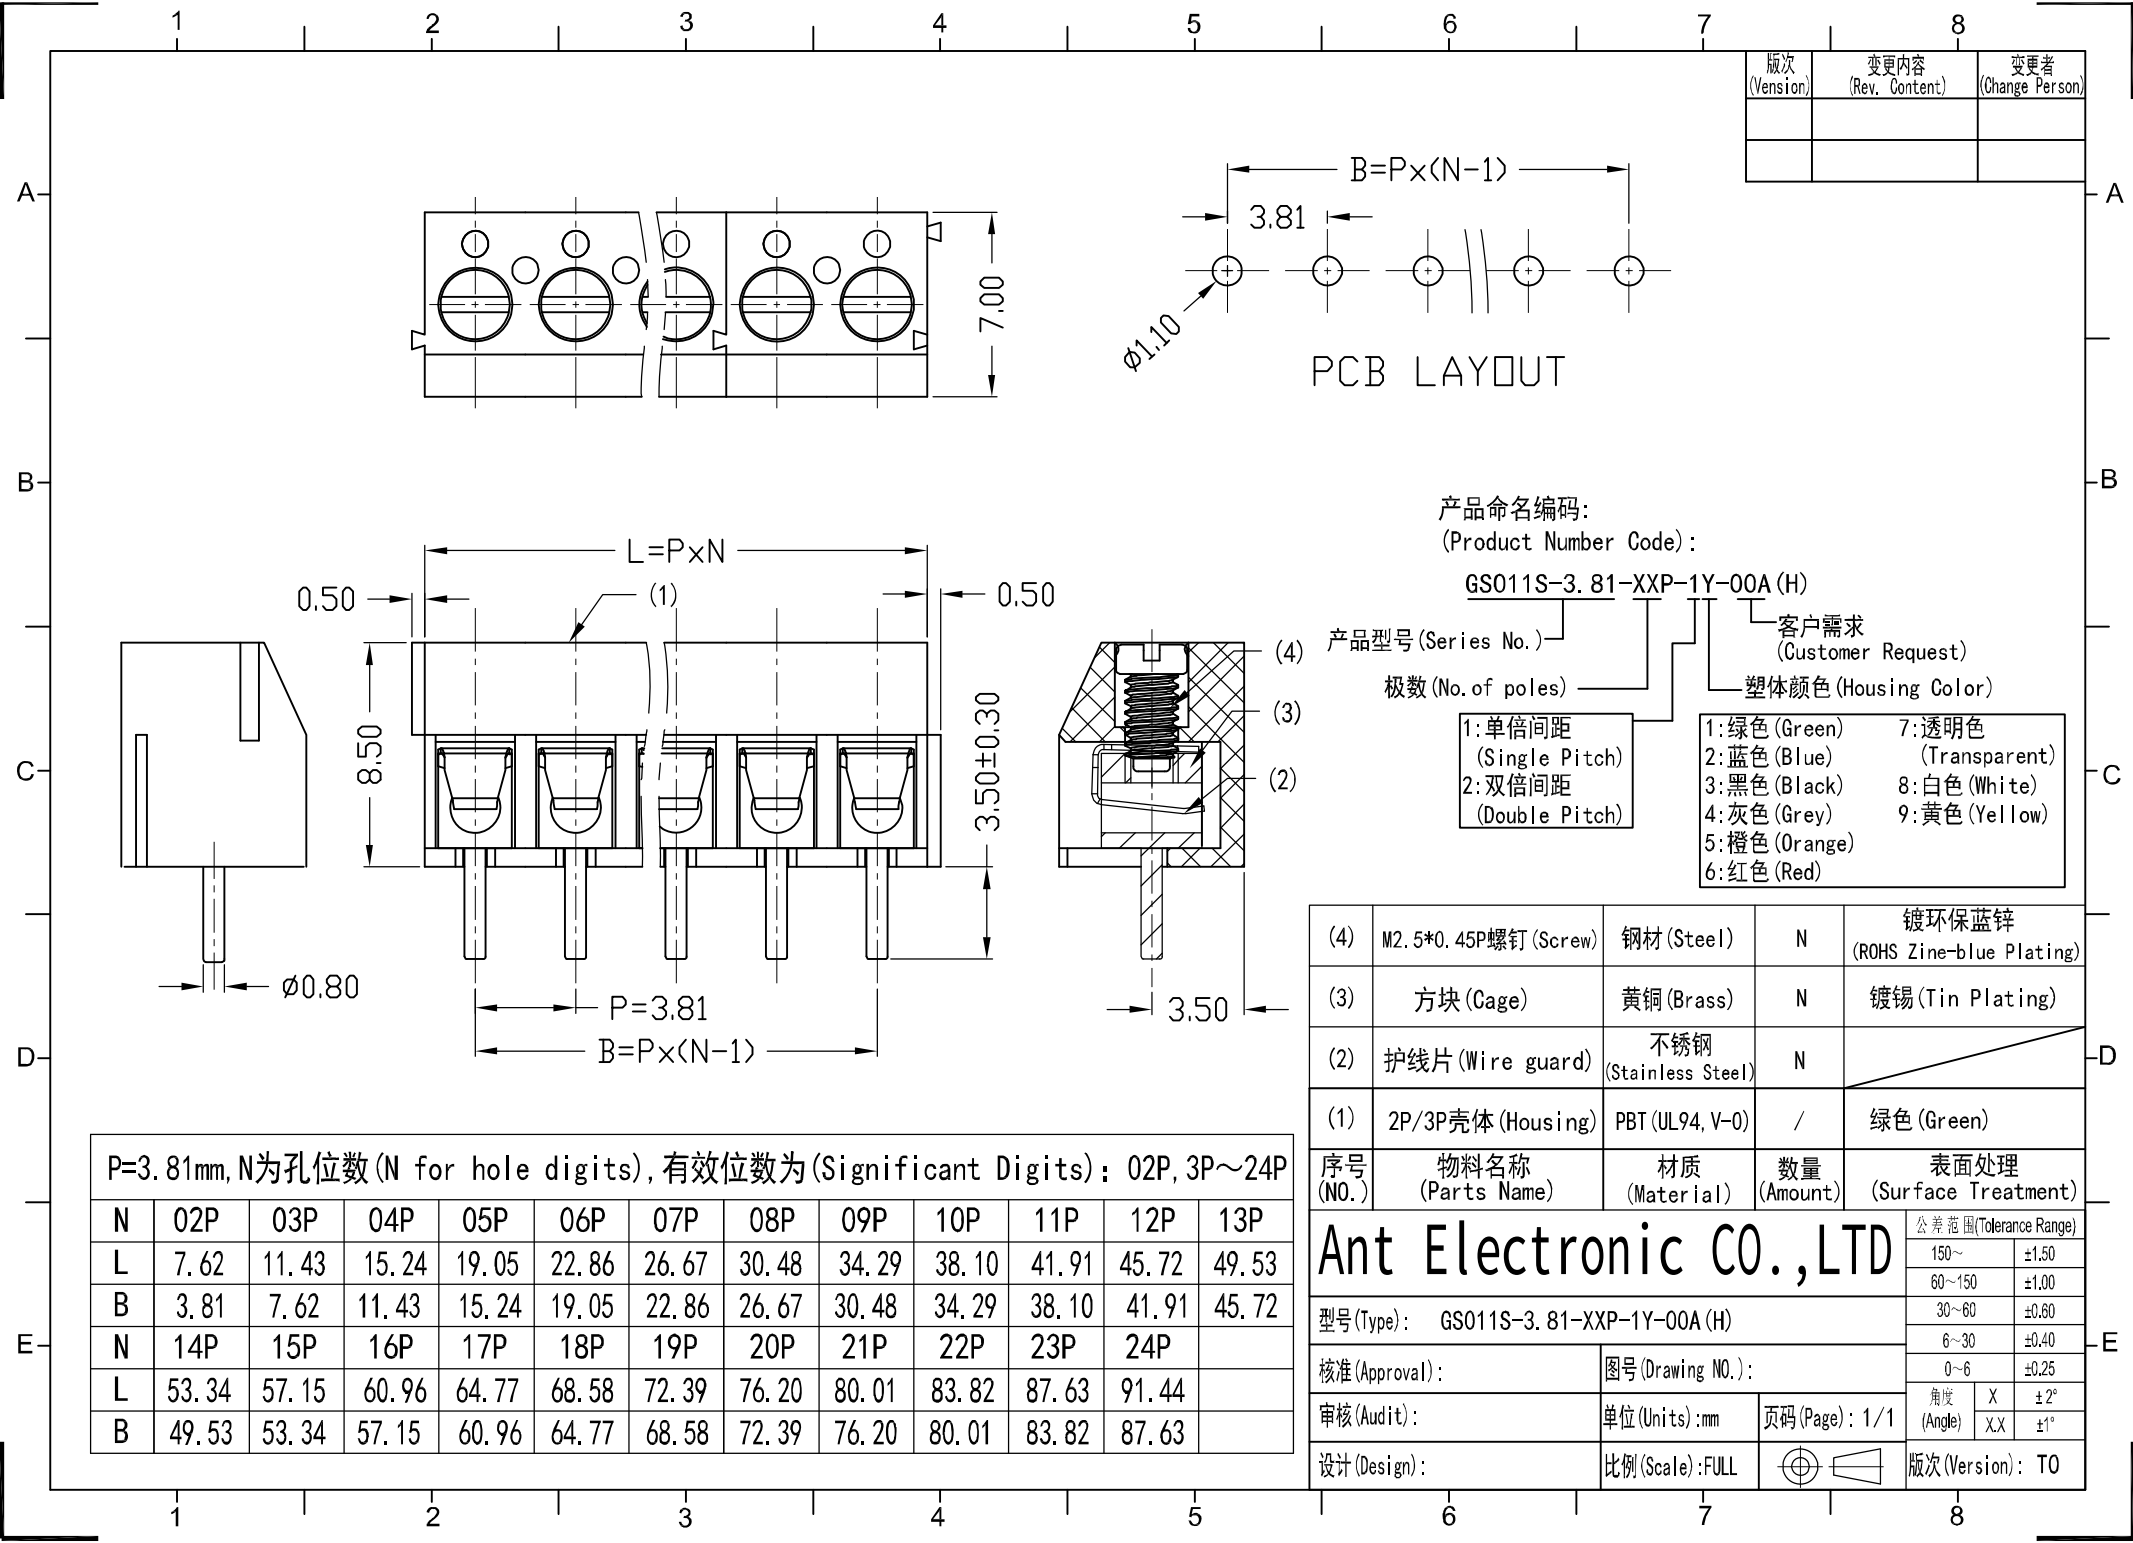

版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

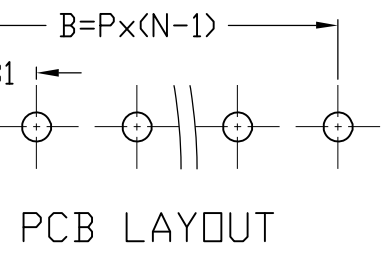

产品命名编码:
(Product Number Code):

GS011S-3.81-XXP-1Y-00A (H)

产品型号 (Series No.)

客户需求
(Customer Request)

极数 (No. of poles)

塑体颜色 (Housing Color)

- 1: 单倍间距
(Single Pitch)
2: 双倍间距
(Double Pitch)

- 1: 绿色 (Green) 7: 透明色
(Transparent)
2: 蓝色 (Blue)
3: 黑色 (Black) 8: 白色 (White)
4: 灰色 (Grey) 9: 黄色 (Yellow)
5: 橙色 (Orange)
6: 红色 (Red)

(4)	M2.5*0.45P螺钉 (Screw)	钢材 (Steel)	N	镀环保蓝锌 (ROHS Zinc-blue Plating)
(3)	方块 (Cage)	黄铜 (Brass)	N	镀锡 (Tin Plating)
(2)	护线片 (Wire guard)	不锈钢 (Stainless Steel)	N	
(1)	2P/3P壳体 (Housing)	PBT (UL94, V-0)	/	绿色 (Green)

序号 (NO.)	物料名称 (Parts Name)	材质 (Material)	数量 (Amount)	表面处理 (Surface Treatment)
-------------	----------------------	------------------	----------------	-----------------------------

Ant Electronic CO., LTD

型号 (Type): GS011S-3.81-XXP-1Y-00A (H)

核准 (Approval):	图号 (Drawing NO.):
审核 (Audit):	单位 (Units): mm 页码 (Page): 1/1
设计 (Design):	比例 (Scale): FULL

公差范围 (Tolerance Range)	
150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 (Angle)	X ±2° X.X ±1°
版次 (Version):	T0

P=3.81mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02P, 3P~24P

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72	49.53
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63	91.44	
B	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63	