


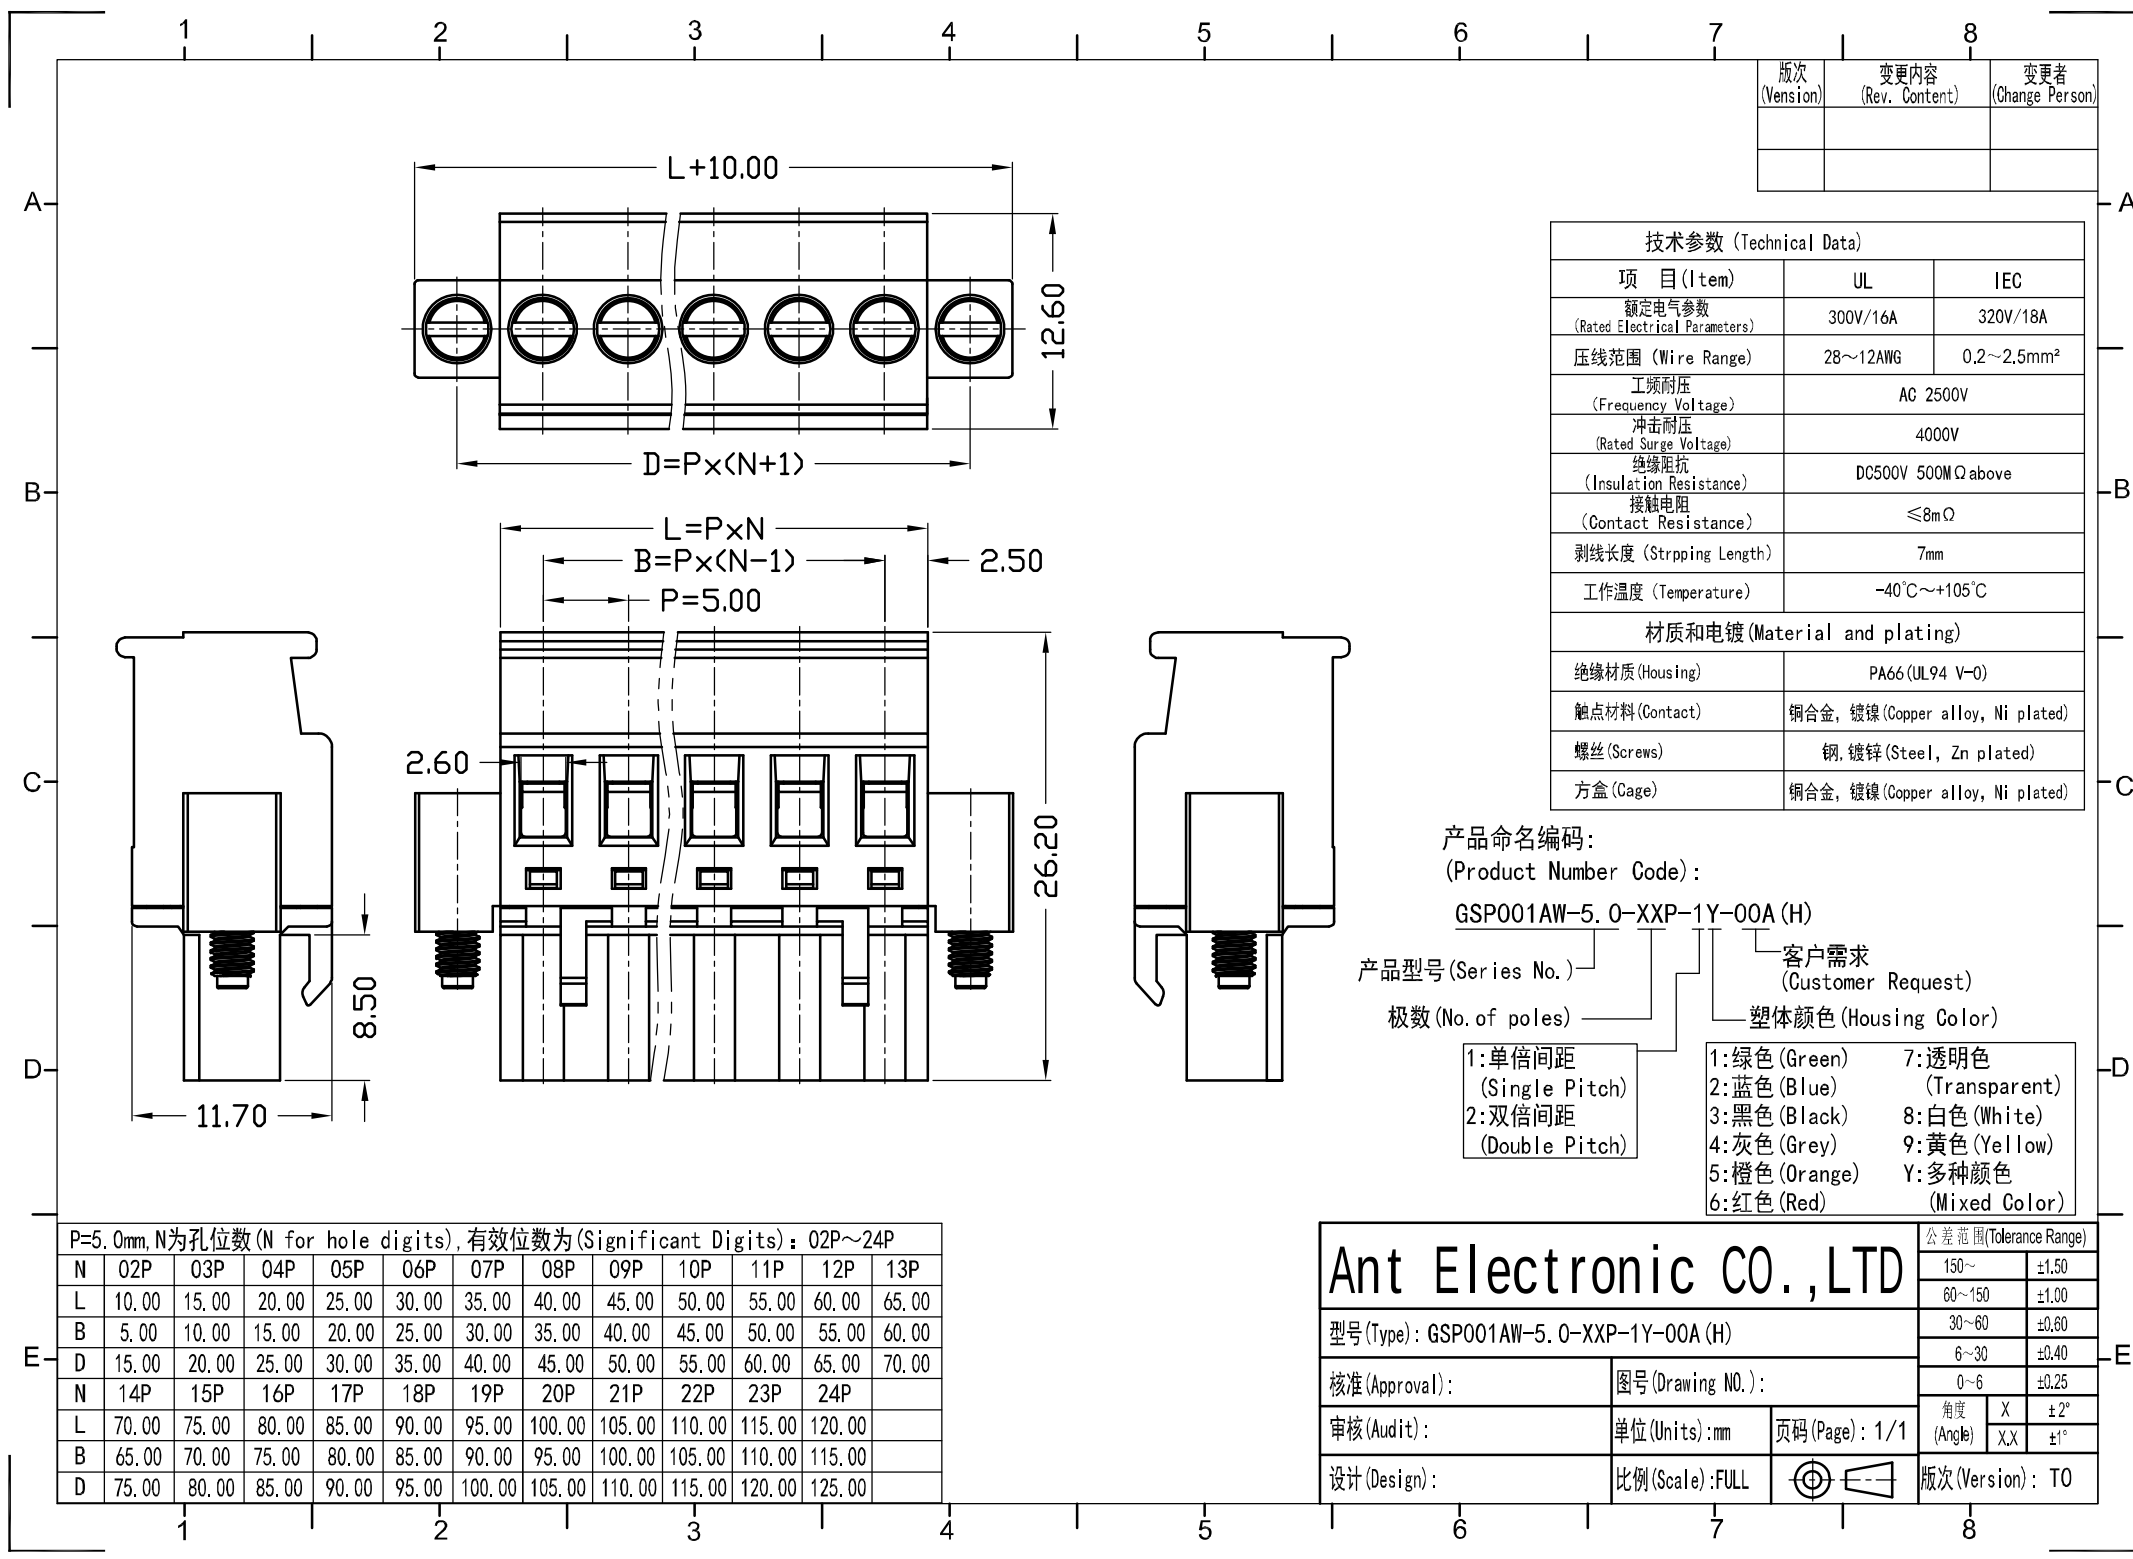

版次 (Vension)	变更内容 (Rev. Content)	变更者 (Change Person)

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/16A	320V/18A
压线范围 (Wire Range)	28~12AWG	0.2~2.5mm²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Strpping Length)	7mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀镍 (Copper alloy, Ni plated)	
螺丝 (Screws)	钢, 镀锌 (Steel, Zn plated)	
方盒 (Cage)	铜合金, 镀镍 (Copper alloy, Ni plated)	

产品命名编码:

(Product Number Code):

GSP001AW-5. 0-XXP-1Y-00A (H)

产品型号 (Series No.)

客户需求
(Customer Request)

极数 (No. of poles)

塑体颜色 (Housing Color)

- 1: 单倍间距
(Single Pitch)
- 2: 双倍间距
(Double Pitch)

- 1: 绿色 (Green)
- 2: 蓝色 (Blue)
- 3: 黑色 (Black)
- 4: 灰色 (Grey)
- 5: 橙色 (Orange)
- 6: 红色 (Red)
- 7: 透明色
(Transparent)
- 8: 白色 (White)
- 9: 黄色 (Yellow)
- Y: 多种颜色
(Mixed Color)

Ant Electronic CO., LTD		公差范围 (Tolerance Range)	
		150~	±1.50
		60~150	±1.00
型号 (Type): GSP001AW-5. 0-XXP-1Y-00A (H)		30~60	±0.80
		6~30	±0.40
核准 (Approval):		0~6	±0.25
审核 (Audit):		角度 (Angle)	X ±2° XX ±1°
设计 (Design):		单位 (Units): mm	页码 (Page): 1/1
		比例 (Scale): FULL	版次 (Version): T0