

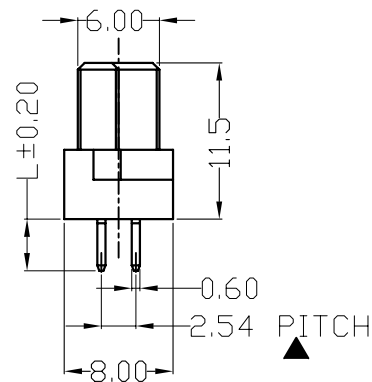


REV	ZONE	REVISION	DATE

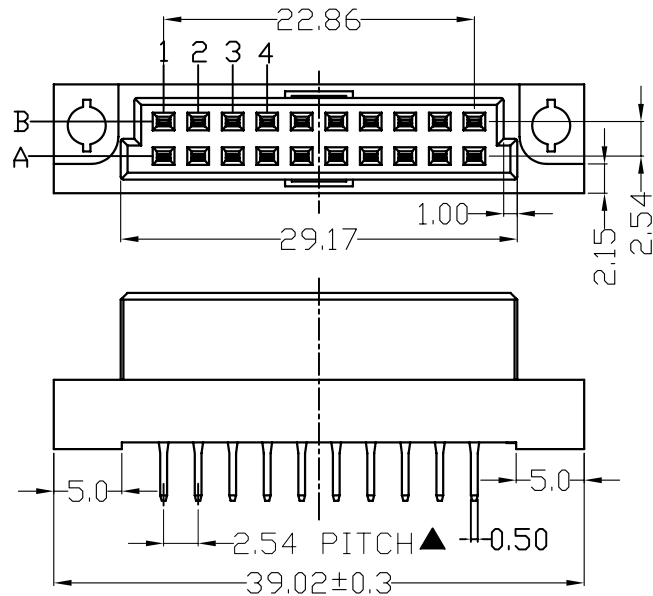

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	20	A B	
	10	A -	
5.08	10	A B	
	5	A -	

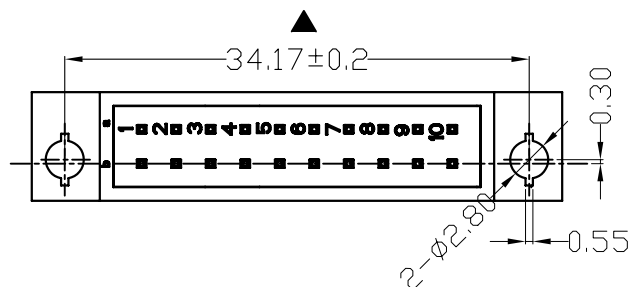

L	Dip Length
A	3.8
B	13.0
C	15.0
D	17.0
E	21.0

Material:
Housing: PBT+GF30% UL94V-0,COLOR:WHITE;
Contacts: Brass T=0.60.

Finish:
Contact: Gold2~3u" Plated over Nickel 80~100u"

Specification:
Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩ Max.at DC 100mA.
Operating Temperature: -55°C~+105°C
Control Dimensions Indicated From" ▲ ".
Withdrawal Force: 1.0-2.0Kg.

Ant Electronic CO.,LTD

COMPUTER NO.			UNIT	SCALE	PART NAME	
			mm	1:1	DIN41612 Series	
APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV
			2007/09/07	x. .x ±0.30 .xx ±0.20	DIN41612-220AB-FS	A0