


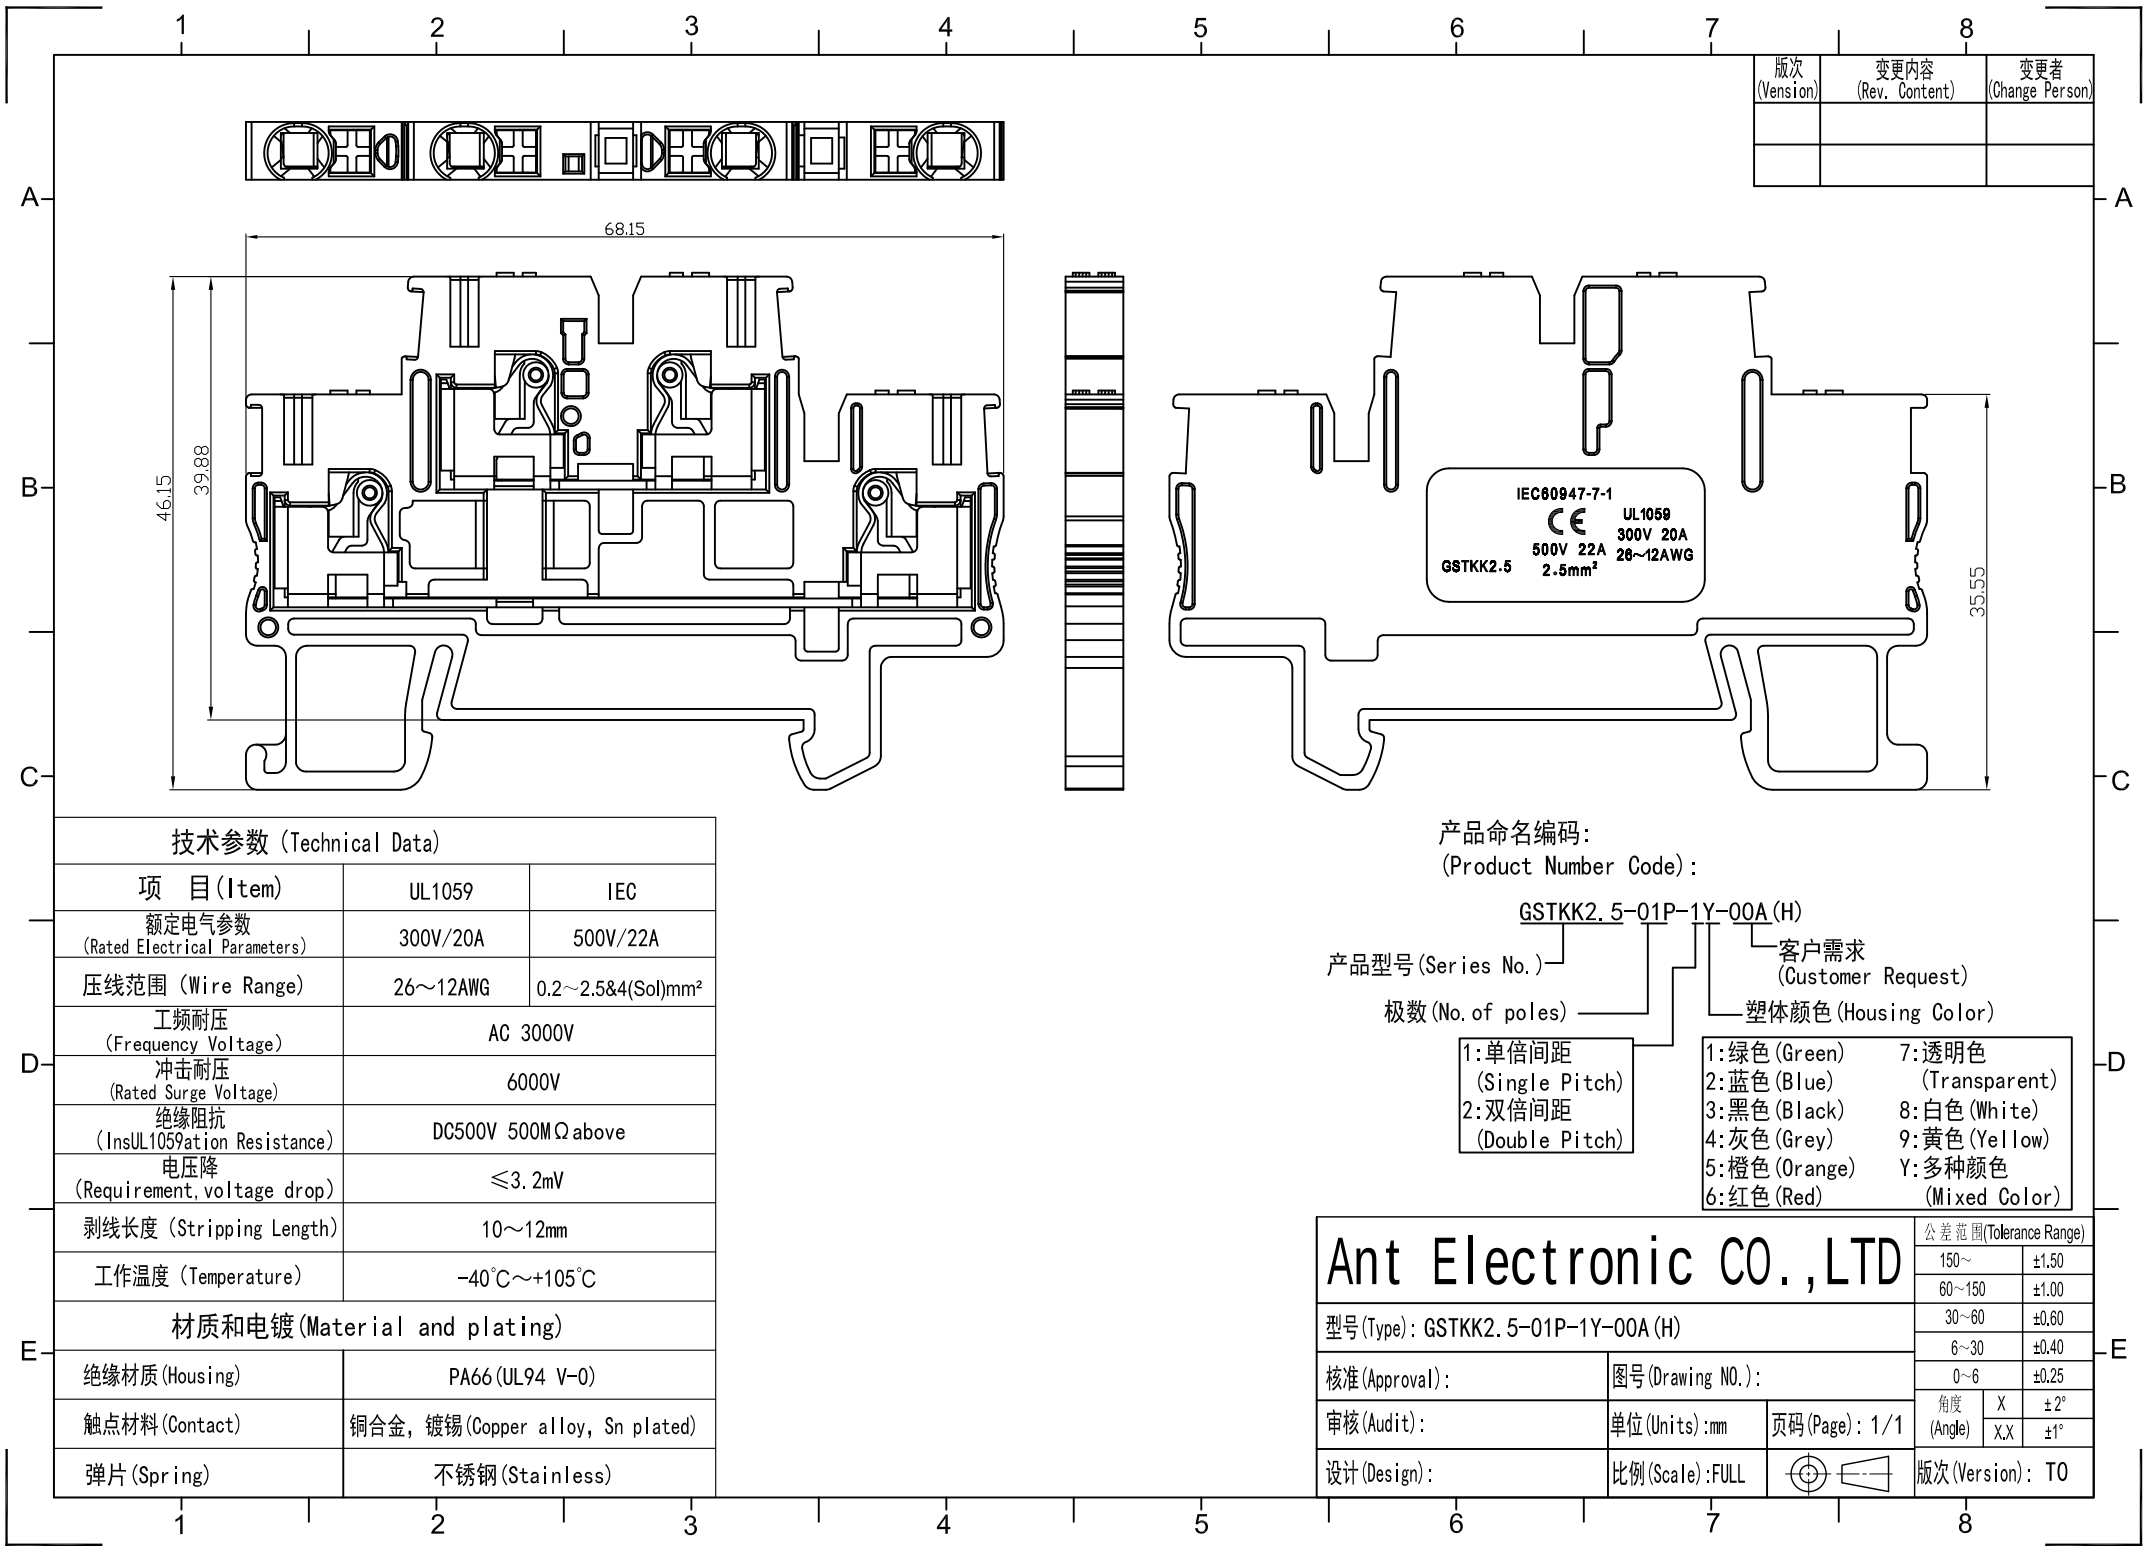

版次 (Vension)	变更内容 (Rev. Content)	变更者 (Change Person)

技术参数 (Technical Data)		
项 目 (Item)	UL1059	IEC
额定电气参数 (Rated Electrical Parameters)	300V/20A	500V/22A
压线范围 (Wire Range)	26~12AWG	0.2~2.5&4(Sol)mm²
工频耐压 (Frequency Voltage)	AC 3000V	
冲击耐压 (Rated Surge Voltage)	6000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
电压降 (Requirement, voltage drop)	≤3.2mV	
剥线长度 (Stripping Length)	10~12mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
弹片 (Spring)	不锈钢 (Stainless)	

产品命名编码: (Product Number Code):		
GSTKK2.5-01P-1Y-00A (H)		
产品型号 (Series No.)	客户需求 (Customer Request)	
极数 (No. of poles)	塑体颜色 (Housing Color)	
1:单倍间距 (Single Pitch) 2:双倍间距 (Double Pitch)	1:绿色 (Green) 2:蓝色 (Blue) 3:黑色 (Black) 4:灰色 (Grey) 5:橙色 (Orange) 6:红色 (Red)	7:透明色 (Transparent) 8:白色 (White) 9:黄色 (Yellow) Y:多种颜色 (Mixed Color)

Ant Electronic CO.,LTD			公差范围 (Tolerance Range)	
型号 (Type): GSTKK2.5-01P-1Y-00A (H)			150~	±1.50
核准 (Approval):			60~150	±1.00
审核 (Audit):			30~60	±0.60
设计 (Design):			6~30	±0.40
比例 (Scale): FULL			0~6	±0.25
图号 (Drawing NO.):			角度 (Angle)	X ±2° XX ±1°
页码 (Page): 1/1			版次 (Version): T0	